

MODEL C03E-1800

Calender for:

- Transfer printing
- Direct inks reactivation
- Thermosetting

1. CHARACTERISTICS OF HEATING CYLINDER:

- 1.1. Diameter : 350 mm (13,78").
- 1.2. Width : 1.800 mm (70,86").
- 1.3. Working Width: 1.650 mm (65").

2. HEATING SYSTEM AND TEMPERATURE CONTROL:

- 2.1. The cylinder is heated by one resistor (heating element) in a vacuum sealed oil bath, in complete absence of air and pressure. MONTI ANTONIO S.p.a system.
- 2.2. The temperature of the cylinder is set by a touch screen and regulated directly through an electronic sheet. The temperature control is equipped with temperature alarm system and a limitation system of maximum temperature (230 °C).

3. TENSION CONTROLS:

3.1. Tension control for printing material:

- Entry: disk brake with pneumatic adjustment and fabric manual brake
- Exit: tangential rolling on the felt and roller driven by felt turn motion

3.2. Tension control for printing paper:

- Entry: disk brake with pneumatic adjustment
- Exit: axial motorised winding with pneumatic device for motion transmission from the main motor

3.3. Tension control for protection paper:

- Entry: disk brake with pneumatic adjustment
- Exit: axial motorised winding with pneumatic device for motion transmission from the main motor

4. OTHER DEVICES INTO MACHINE:

- 4.1. NOMEX felt with pneumatic tension adjustment system and felt-centring device by electro-mechanic sensor.
- 4.2. Incorporated system of felt protection in case of black out and/or compressed air lack
- 4.3. Meter-counter, with alarm to predetermine the length of production runs
- 4.4. General management of the machine, including temperature control by adjustable PLC for the memorization of production data
- 4.5. Front touch-screen keyboard for several access to many work programs.

5. ROLLS DIAMETER MACHINE WITHOUT OPTIONS:

- Fabric roll diameter in entry 300 mm (11,81").
- Fabric roll diameter in exit 300 mm (11,81").
- Printing paper roll diameter in entry 250 mm (9,84") - Larger diameters on request.
- Printing paper roll diameter in exit 250 mm (9,84") - Larger diameters on request.
- Protection paper roll diameter in entry 250 mm (9,84").
- Protection paper roll diameter in exit 250 mm (9,84").

6. TECHNICAL DATA:

- 6.1. Installed power: 19,67 kW
- 6.2. Average electric consumption: 13,37 kW/h

All data and technical features are purely indicative, subjected to changes without prior notice and refer to standard machines without options

MODEL C03E-1800

- 6.3. Compressed air pressure: 4-8 bar
- 6.4. Mechanic speed: 0,3 – 4 m/min
- 6.5. Overall dimensions: width 3.210 mm (126,38"). length 1.120 mm (44,1"). height 1.625 mm (64").
- 6.6. Net weight: to be confirmed
- 6.7. Machine produced according to CE rules
- 6.8. Customs tariff: 84 51 80 30

All data and technical features are purely indicative, subjected to changes without prior notice and refer to standard machines without options

INNOVATION
SPEED
FLEXIBILITY
PROJECT&DESIGN
INSTALLATION AND ASSISTANCE




Monti Antonio S.p.A.
Head Office: via dell'Electronica n°5, 36016 Thiene (VI) Italy
Operation and Administration: via della Fiska n°8, 36016 Thiene (VI) Italy
T. +39 0445 364619 +39 0445 364707 - sales@montiantonio.com
www.montiantonio.com


TECHNICAL DATA

C03E

PRINTING

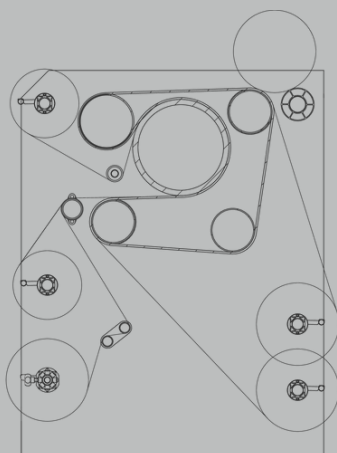

STANDARD



WITH OPTIONS

Cylinder width / Tavola cilindro	mm	1800 (70.86")
Working width / Tavola utile	mm	1650 (65")
Heating cylinder diameter / Diametro cilindro riscaldato	mm	350 (13.78")
Installed electric power / Potenza elettrica installata	kW	21
Average consumption / Consumo medio	kW/h	13
Mechanical speed / Velocità meccanica	m/min	0.3 ÷ 4
Net weight / Peso netto	Kg	1500

monti green
environment friendly solutions

monti plus+
advanced technology

member of
ACIAIT
ITALIAN TEXTILE MACHINERY

ALL DATA AND TECHNICAL FEATURES ARE PURELY INDICATIVE, SUBJECTED TO CHANGES WITHOUT PRIOR NOTICE AND REFER TO STANDARD MACHINES WITHOUT OPTIONS. PICTURES SHOWN ARE STOCK IMAGES AND MAY INCLUDE OPTIONS NOT INCLUDED AS STANDARD.

I DATI E LE CARATTERISTICHE TECNICHE SONO PURAMENTE INDICATIVI, SOGGETTI A VARIAZIONE SENZA OBBLIGO DI PREAVVISO E RELATIVI A MACCHINE SENZA OPTIONAL. LE FOTO INSERITE SONO IMMAGINI A STOCK E POSSONO INCLUDERE OPTIONAL NON COMPRESI DI SERIE.

©2022 Monti Antonio S.p.A.
All rights reserved

 **MONTI ANTONIO**[®]
STANDARD & CUSTOM HEATING SOLUTIONS

INNOVATION
SPEED
FLEXIBILITY
PROJECT&DESIGN
INSTALLATION AND ASSISTANCE

Monti Antonio S.p.A.
Head Office: via dell'Elettronica n°5, 36016 Thiene (VI) Italy
Operation and Administration: via della Fisica n°6, 36016 Thiene (VI) Italy
T. +39 0445 364619 +39 0445 364707 - sales@montiantonio.com
www.montiantonio.com